

FUTEK MODEL LSM325
 STK# FSH00014



FOLD BACK PARALLEL BEAM LOAD CELL (OEM)

(Previously L2336)

Drawing Number: FI1126

INCH [mm] R.O.= Rated Output

WIRING CODE (WC1)			
+Excitation	-Excitation	+Signal	-Signal
RED	BLACK	GREEN	WHITE

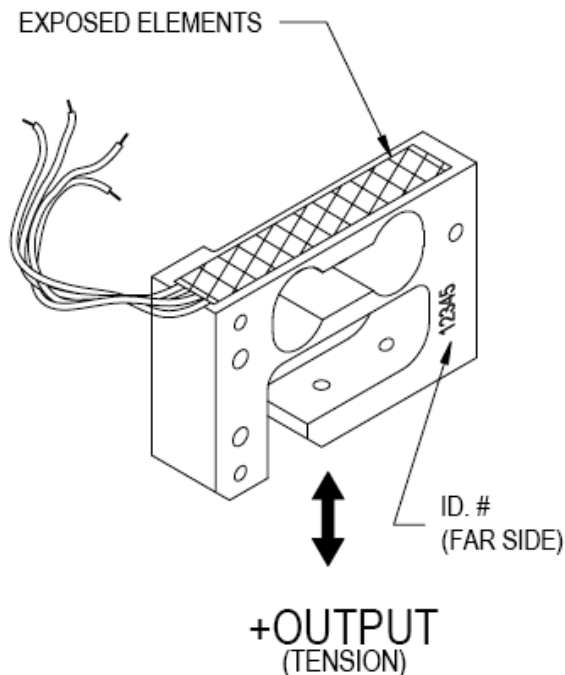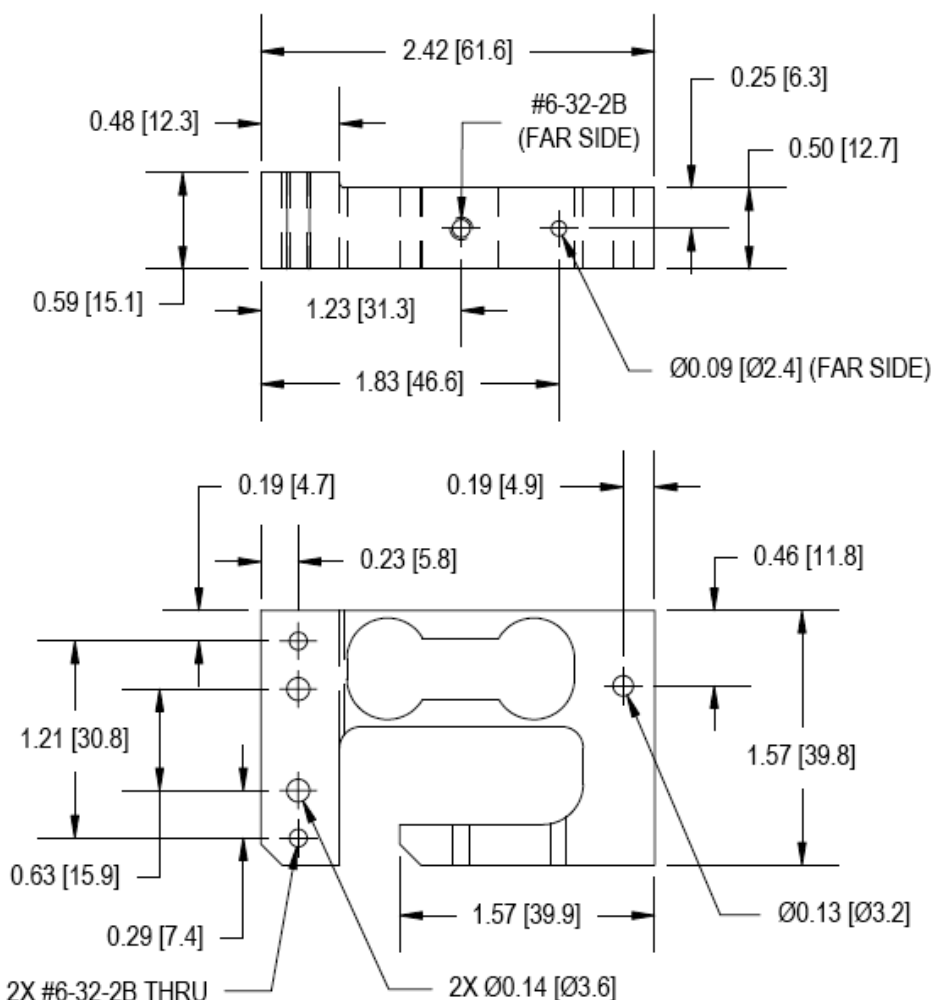

SPECIFICATIONS:

RATED OUTPUT	2.3 mV/V nom.
CAPACITY $\frac{lb}{N}$	$\frac{10}{44.5}$
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	1% of R.O.
EXCITATION (VDC OR VAC)	20 MAX
BRIDGE RESISTANCE	1000 Ω nom.
NONLINEARITY	$\pm 0.2\%$ of R.O.
HYSTERESIS	$\pm 0.2\%$ of R.O.
NONREPEATABILITY	$\pm 0.1\%$ of R.O.
TEMP. SHIFT ZERO	$\pm 0.02\%$ of R.O./°F [0.036% of R.O./°C]
TEMP. SHIFT SPAN	$\pm 0.02\%$ of LOAD/°F [0.036% of LOAD/°C]
COMPENSATED TEMP.	60 to 160°F [16 to 72°C]
OPERATING TEMP.	-60 to 200°F [-50 to 93°C]
WEIGHT	1 oz [28 g]
MATERIAL	ALUMINUM
DEFLECTION	0.009 [0.23]
CABLE: #29 AWG, 4 Conductor, Spiral Teflon Cable 3 in. [76.2] Long	
ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE	
CALIBRATION (AVAILABLE)	5 pt. TENSION; 150K Ω SHUNT CAL. VALUE
CALIBRATION TEST EXCITATION	10 VDC

系泰機電有限公司

Tel : (04)2706-9659
 Fax: (04)2452-0110

www.accusystem.com
 E-mail: sales@accusystem.com